

REF. DESIG.	QTY	PART NO.	DESCRIPTION	REF. DESIG.	QTY	PART NO.	DESCRIPTION
001B	1	097X064030	FRONT CASE	E101	1	QK0036202R	INTERNAL SPEAKER
002B	1	097X107010	NET FOR INTERNAL SPEAKER	N101	1	MS5000026R	INTERNAL MICROPHONE
003B	1	097X158010	WINDOW FOR LCD	J401	1	YJ10002220	ANTENNA CONNECTOR
004B	2	061X120010	INSULATOR FOR LCD	W101	1	WE061X010R	27 PIN FLEXIBLE P.C. BOARD
005B	1	097X270010	BUTTON FOR KEYPAD	Y001	1	YR9901204R	FLEXIBLE ANTENNA
006B	1	097X303010	MASK FOR LCD				
007B	1	097X120020	INSULATOR FOR LCD	PA01	1	WZ997X0200	AF P.C. BOARD
008B	2	51300205B0	SCREW FOR CONTROL P.C. BOARD				
009B	6	296Z010010	SCREW FOR CONTROL P.C. BOARD	C201	1	DD95270300	27 PF +-5% CH
010B	2	032X129010	CONTACTOR FOR GROUND	C202	1	DD95270300	27 PF +-5% CH
011B	1	296Z005010	CLAMPER FOR INTERNAL SPEAKER	C203	1	DK96102300	0.001 UF +-10%
012B	2	061X056010	BUFFER FOR LAMP	C204	1	DK96102300	0.001 UF +-10%
013B	2	53110203A0	NUT FOR GROUND SPRING	C205	1	DK96102300	0.001 UF +-10%
014B	1	097X123020	CONTACTOR FOR GROUND	C206	1	DK96102300	0.001 UF +-10%
015B	2	097X120040	INSULATOR FOR LCD	C207	1	DK56473200	0.047 UF +-10%
020B	1	097X064020	REAR CASE	C208	1	EY47502520	ELECT CAP 4.7 UF/25V
021B	1	097X861030	LABEL FOR C528	C209	1	DK96102300	0.001 UF +-10%
022B	1	097X258010	BELT CLIP	C210	1	DK96102300	0.001 UF +-10%
023B	2	5110260350	SCREW FOR BELT CLIP	C211	1	DK5668320R	0.068 UF +-10%
024B	2	032X010020	SCREW FOR REARCASE	C212	1	DK5668320R	0.068 UF +-10%
025B	1	097X053010	CAP FOR MICROPHONE/SPEAKER JACK	C213	1	DK96102300	0.001 UF +-10%
026B	1	224C011010	NUT FOR ANTENNA	C214	1	DK96102300	0.001 UF +-10%
027B	1	097X123010	CONTACTOR FOR ANTENNA	C215	1	DK56473200	0.047 UF +-10%
028B	1	061X270030	BUTTON FOR LOCK	C216	1	EJ22700610	ELECT CAP 220 UF/6.3V
029B	1	061X116010	SPRING FOR LOCK	C217	1	DK96102300	0.001 UF +-10%
030B	11	51060203A0	SCREW FOR MAIN P.C. BOARD	C218	1	DK96102300	0.001 UF +-10%
031B	1	061X067020	CAP FOR DC IN JACK	C219	1	DK96102300	0.001 UF +-10%
032B	4	296Z010060	SCREW FOR SPRING	C220	1	DK96102300	0.001 UF +-10%
033B	2	62031340W0	LUG FOR POWER MODULE	C221	1	DK96102300	0.001 UF +-10%
034B	2	097X101020	SUPPORT FOR SHIELD	C222	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V
035B	2	097X101010	SUPPORT FOR SHIELD	C223	1	DK96102300	0.001 UF +-10%
036B	2	51060202A0	SCREW FOR SHIELD	C224	1	DK56473200	0.047 UF +-10%
040B	1	097X160010	BRACKET FOR ESCUTCHEON	C225	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V
041B	1	097X063010	ESCUTCHEON	C226	1	EY33600620	ELECT CAP 33 UF/6.3V
042B	2	097X154030	KNOB FOR SQUELCH CONTROL	C227	1	DK96102300	0.001 UF +-10%
043B	1	097X154020	KNOB FOR ROTARY CHANNEL SELECTOR	C228	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V
044B	2	097X154010	KNOB FOR VOLUME CONTROL	C229	1	EY33600620	ELECT CAP 33 UF/6.3V
045B	1	061X156010	HAND STRAP FOR C528	C230	1	DK96102300	0.001 UF +-10%
046B	3	296Z011010	NUT FOR VOLUME CONTROL	C231	1	EY33600620	ELECT CAP 33 UF/6.3V
047B	1	061X160020	BRACKET FOR VOLUME CONTROL	C232	1	DK96102300	0.001 UF +-10%
052B	1	061X123010	CONTACTOR	C233	1	DK96102300	0.001 UF +-10%
053B	1	061X123020	CONTACTOR	C234	1	DK96102300	0.001 UF +-10%
056B	2	061X123050	CONTACTOR	C235	1	EY33600620	ELECT CAP 33 UF/6.3V
060B	1	339C064010	BATTERY CASE (FRONT)	C236	1	DK96102300	0.001 UF +-10%
061B	1	339C064020	BATTERY CASE (REAR)	C237	1	DK96102300	0.001 UF +-10%
064B	1	061X123130	CONTACTOR	C238	1	DK96102300	0.001 UF +-10%
065B	1	061X123140	CONTACTOR	C239	1	EY33600620	ELECT CAP 33 UF/6.3V
066B	2	061X123150	CONTACTOR	C240	1	DK96102300	0.001 UF +-10%
067B	1	159C861020	MONTHLY PRODUCTION LABEL	C241	1	EY10505020	ELECT CAP 1 UF/50V
001X	3	062X109020	SHIELD FOR UHF	C242	1	DK96102300	0.001 UF +-10%
002X	2	097X109020	SHIELD FOR VCO	C243	1	EJ1070161R	ELECT CAP 100 UF/16V
003X	1	061X123060	CONTACTOR FOR BATTERY CASE	C244	1	DK96102300	0.001 UF +-10%
004X	2	061X120020	INSULATOR FOR PIT BUTTON	C245	1	DK96102300	0.001 UF +-10%
005X	1	296Z107020	SHEET FOR BATTERY	C246	1	DK96102300	0.001 UF +-10%
006X	1	296Z107030	SHEET FOR BATTERY	C247	1	DD95220300	22 PF +-5% CH
007X	1	097X109010	SHIELD FOR RF P.C. BOARD	C248	1	DD95300300	30 PF +-5% CH
008X	1	097X120010	INSULATOR FOR SHIELD	C249	1	DK96102300	0.001 UF +-10%
009X	14	097X1254010	PIN FOR VCO	C250	1	DK9622320R	0.022 UF +-10%
010X	1	097X120030	INSULATOR FOR CTD	C251	1	DK9622320R	0.022 UF +-10%
011X	1	061X122010	ADHESIVE FOR CRYSTAL	C252	1	DD95101300	100 PF +-5% CH
001T	1	097X851010	OWNER'S MANUAL				
001U	1	097X804020	SLEEVE FOR C528				
002U	5	097X805020	MASTER CARTON FOR C528				
003U	1	097X809010	CUSHION				
004U	1	296Z809020	CUSHION LID				
005U	1	9011530010	POLYETHYLENE BAG FOR C528				
007U	3	9523019010	SERIAL NUMBER LABEL				

REF. DESIG.	QTY	PART NO.	DESCRIPTION
C253	1	DK96102300	0.001 UF +-10%
C254	1	KC0971004R	TANTAL CAP 22 UF/6.3V
C256	1	DK96103200	0.01 UF +-10%
C257	1	DK96102300	0.001 UF +-10%
C258	1	DK96222300	0.0022 UF +-10%
C259	1	DK96102300	0.001 UF +-10%
C260	1	DK9622320R	0.022 UF +-10%
C261	1	DK46224200	0.22 UF +-10%
C262	1	DK46224200	0.22 UF +-10%
C263	1	DK96102300	0.001 UF +-10%
C264	1	DK96102300	0.001 UF +-10%
C265	1	DD95330300	33 PF +-5% CH
C266	1	DK96103200	0.001 UF +-10%
C267	1	DK9622320R	0.022 UF +-10%
C268	1	DK96103200	0.01 UF +-10%
C269	1	DK46224200	0.22 UF +-10%
C270	1	DK5668320R	0.068 UF +-10%
C271	1	DK96103200	0.01 UF +-10%
C272	1	DK46104200	0.1 UF +-10%
C273	1	DK46104200	0.1 UF +-10%
C274	1	DK56473200	0.047 UF +-10%
C275	1	DK5668320R	0.068 UF +-10%
C277	1	DK96103200	0.01 UF +-10%
C278	1	DK96102300	0.001 UF +-10%
C279	1	DK96102300	0.001 UF +-10%
C280	1	DK96682300	0.0068 UF +-10%
C281	1	EY47502520	ELECT CAP 4.7 UF/25V
C282	1	DK9622320R	0.022 UF +-10%
C283	1	DK9627320R	0.027 UF +-10%
C284	1	DK96682300	0.0068 UF +-10%
C285	1	EY10505020	ELECT CAP 1 UF/50V
C286	1	DK5656320R	0.056 UF +-10%
C287	1	EJ22700610	ELECT CAP 220 UF/6.3V
C288	1	DD95220300	22 PF +-5% CH
C289	1	DD95300300	30 PF +-5% CH
C290	1	DK96102300	0.001 UF +-10%
C291	1	DK9622320R	0.022 UF +-10%
C292	1	DK9622320R	0.022 UF +-10%
C293	1	DD95101300	100 PF +-5% CH
C294	1	KC0971004R	TANTAL CAP 22 UF/6.3V
C295	1	DK9622320R	0.022 UF +-10%
C296	1	DK96103200	0.01 UF +-10%
C297	1	DK96102300	0.001 UF +-10%
C298	1	DK96222300	0.0022 UF +-10%
C299	1	DK96102300	0.001 UF +-10%
C301	1	DK9622320R	0.022 UF +-10%
C302	1	DK46224200	0.22 UF +-10%
C303	1	DK46224200	0.22 UF +-10%
C304	1	DK96102300	0.001 UF +-10%
C305	1	DK96102300	0.001 UF +-10%
C306	1	DD95330300	33 PF +-5% CH
C307	1	DK96102300	0.001 UF +-10%
C308	1	DK9622320R	0.022 UF +-10%
C309	1	DK96103200	0.01 UF +-10%
C310	1	DK46224200	0.22 UF +-10%
C311	1	DK5668320R	0.068 UF +-10%
C312	1	DK96103200	0.01 UF +-10%
C313	1	DK46104200	0.1 UF +-10%
C314	1	DK46104200	0.1 UF +-10%
C315	1	DK56473200	0.047 UF +-10%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
C316	1	DK5668320R	0.068 UF +-10%
C318	1	DK96472300	0.0047 UF +-10%
C319	1	DK46224200	0.22 UF +-10%
C320	1	DK9622320R	0.022 UF +-10%
C321	1	DK96102300	0.001 UF +-10%
C322	1	DK9622320R	0.022 UF +-10%
C323	1	EY10505020	ELECT CAP 1 UF/50V
C324	1	DK5656320R	0.056 UF +-10%
C325	1	EJ22700610	ELECT CAP 220 UF/6.3V
C326	1	DK96102300	0.001 UF +-10%
C327	1	EJ22700610	ELECT CAP 220 UF/6.3V
C328	1	DK96102300	0.001 UF +-10%
C329	1	DK96102300	0.001 UF +-10%
C330	1	DK96103200	0.01 UF +-10%
C331	1	DK96472300	0.0047 UF +-10%
C332	1	DK9622320R	0.022 UF +-10%
C333	1	DK9622320R	0.022 UF +-10%
C334	1	DK46104200	0.01 UF +-10%
C335	1	DD95680300	68 PF +-5% CH
C336	1	DK96102300	0.001 UF +-10%
C337	1	EY47502520	ELECT CAP 4.7 UF/25V
C338	1	DK5668320R	0.068 UF +-10%
C339	1	DK96222300	0.0022 UF +-10%
C340	1	DK96471300	470 PF +-10%
C341	1	DK5668320R	0.068 UF +-10%
C343	1	DK46562300	0.0056 UF +-10%
C344	1	DK96102300	0.001 UF +-10%
C345	1	EY33600620	ELECT CAP 33 UF/6.3V
C346	1	DK96102300	0.001 UF +-10%
C347	1	DK5668320R	0.068 UF +-10%
C348	1	DK5668320R	0.068 UF +-10%
C349	1	DK96102300	0.001 UF +-10%
C350	1	DK96102300	0.001 UF +-10%
C351	1	DK96102300	0.001 UF +-10%
C352	1	DK96102300	0.001 UF +-10%
C353	1	DK96102300	0.001 UF +-10%
C354	1	DK96102300	0.001 UF +-10%
C355	1	DK96102300	0.001 UF +-10%
F201	1	FC455304E3	CERAMIC FILTER CF0455E
F202	1	FC455304E3	CERAMIC FILTER CF0455E
J201	1	YJ0700402R	15 PIN JACK TO W401
J202	1	YJ0700403R	8 PIN JACK TO W402
J203	1	YJ0700404R	6 PIN JACK TO W403
J204	1	YJ06011960	12 PIN JACK TO W801
J205	1	YJ04001530	DC IN JACK
L201	1	FC9002002R	FERRITE BEAD
L202	1	FC9002002R	FERRITE BEAD
L203	1	FC9002002R	FERRITE BEAD
L204	1	FC9002002R	FERRITE BEAD
L205	1	FC9002002R	FERRITE BEAD
Q201	1	HU1003706R	MICROPROCESSOR UPD75108CF
Q202	1	HZ2000320R	DIODE MC2846
Q203	1	HZ2001221R	DIODE DA112
Q204	1	BA1000220R	DIGITAL TRANSISTOR RTIP441N
Q205	1	BA1001521R	DIGITAL TRANSISTOR DTA123YU
Q206	1	BA2000120R	DIGITAL TRANSISTOR RTIN441N
Q207	1	HZ2000320R	DIODE MC2846
Q208	1	HZ2000320R	DIODE MC2846
Q209	1	HZ2000320R	DIODE MC2846
Q210	1	HZ2000320R	DIODE MC2846

REF. DESIG.	QTY	PART NO.	DESCRIPTION
Q211	1	BA2001821R	DIGITAL TRANSISTOR FMA2
Q212	1	BA1000120R	DIGITAL TRANSISTOR RTIP434M
Q213	1	BA1000320R	DIGITAL TRANSISTOR RTIP141M
Q214	1	BA2001821R	DIGITAL TRANSISTOR FMA2
Q215	1	BA10006210	DIGITAL TRANSISTOR FMA4
Q216	1	BA1000320R	DIGITAL TRANSISTOR RTIP141M
Q217	1	HC98005530	5V REGULATOR S81250RG
Q218	1	HZ2000420R	DIODE MC2846
Q219	1	HZ2000320R	DIODE MC2846
Q220	1	BA2000320R	DIGITAL TRANSISTOR RTIN141M
Q221	1	HX341541AR	2SC4154(F)
Q222	1	HC9800453R	4V REGULATOR S81240AC
Q223	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q224	1	HX207981A0	2SB798(DL)
Q225	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q226	1	HX10812180	2SA812(M5)
Q227	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q228	1	HX207981A0	2SB798(DL)
Q229	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q230	1	HX207981A0	2SB798(DL)
Q231	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q232	1	HX207981A0	2SB798(DL)
Q233	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q234	1	HX207981A0	2SB798(DL)
Q235	1	HZ2000420R	DIODE MC2848
Q236	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q237	1	HX207981A0	2SB798(DL)
Q238	1	HD2002801R	DIODE V06C
Q239	1	HD2002801R	DIODE V06C
Q240	1	HC10013420	TK10420M
Q241	1	HZ20006020	DIODE MA714
Q242	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q243	1	HZ20006020	DIODE MA714
Q244	1	BA2000120R	DIGITAL TRANSISTOR RTIN441M
Q245	1	HZ2000420R	DIODE MC2846
Q246	1	HY101441AR	2SJ144(Y)
Q247	1	HX341541AR	2SC4154(F)
Q248	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q249	1	HC10013420	TK10420M
Q250	1	HZ20006020	DIODE MA714
Q251	1	BA2003121R	DIGITAL TRANSISTOR FFW1
Q252	1	HZ20006020	DIODE MA714
Q253	1	HY101441AR	2SJ144(Y)
Q254	1	HY101441AR	2SJ144(Y)
Q255	1	HX341541AR	2SC4154(F)
Q256	1	HC10067090	NJM2073M
Q257	1	HC10185050	TC4569F
Q258	1	HC1025405R	TC4566F
Q259	1	HC1025405R	TC4566F
Q260	1	HC1025405R	TC4566F
Q261	1	HC1005709R	NJM4558E
Q262	1	HZ30750050	ZENER DIODE 02CZ7.5V
Q263	1	BA2003221R	DIGITAL TRANSISTOR FRA9
Q264	1	HZ20008210	DIODE DA204U
Q265	1	HZ20008210	DIODE DA204U
Q266	1	HI1007702R	RX/TX LED
Q268	1	BA1000120R	DIGITAL TRANSISTOR RTIP434M
Q269	1	HC1001753R	REGULATOR S80730AL
R201	1	NN05473610	47 KOHM 1/16W +-5%
R202	1	NN05103610	10 KOHM 1/16W +-5%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
R203	1	NI05000110	0 OHM 1/10W
R204	1	NN05223610	22 KOHM 1/16W +-5%
R205	1	NN05223610	22 KOHM 1/16W +-5%
R206	1	NN05223610	22 KOHM 1/16W +-5%
R207	1	NN05223610	22 KOHM 1/16W +-5%
R208	1	NN05473610	47 KOHM 1/16W +-5%
R209	1	NN05473610	47 KOHM 1/16W +-5%
R210	1	NN05473610	47 KOHM 1/16W +-5%
R211	1	NN05473610	47 KOHM 1/16W +-5%
R212	1	NN05104610	100 KOHM 1/16W +-5%
R213	1	NN05471610	470 OHM 1/16W +-5%
R215	1	NI05000110	0 OHM 1/10W
R216	1	NN05000610	0 OHM 1/16W
R217	1	NN05223610	22 KOHM 1/16W +-5%
R218	1	NN05103610	10 KOHM 1/16W +-5%
R219	1	NN05473610	47 KOHM 1/16W +-5%
R220	1	NN05000610	0 OHM 1/16W
R221	1	NN05103610	10 KOHM 1/16W +-5%
R222	1	NN05473610	47 KOHM 1/16W +-5%
R223	1	NN05103610	10 KOHM 1/16W +-5%
R224	1	NN05104610	100 KOHM 1/16W +-5%
R225	1	NN05101610	100 OHM 1/16W +-5%
R226	1	NN05101610	100 OHM 1/16W +-5%
R227	1	NY05030050	VARIABLE RESISTOR 50 KOHM
R228	1	NY05030050	VARIABLE RESISTOR 50 KOHM
R229	1	NY05040050	VARIABLE RESISTOR 500 KOHM
R230	1	NN05104610	100 KOHM 1/16W +-5%
R231	1	NI05103110	10 KOHM 1/10W +-5%
R232	1	NN05000610	0 OHM 1/16W
R233	1	NN05000610	0 OHM 1/16W
R234	1	NN05000610	0 OHM 1/16W
R235	1	NN05470610	47 OHM 1/16W +-5%
R236	1	NI05000110	0 OHM 1/10W
R237	1	NN05473610	47 KOHM 1/16W +-5%
R238	1	NN05000610	0 OHM 1/16W
R239	1	NN05472610	4.7 KOHM 1/16W +-5%
R241	1	NN05473610	47 KOHM 1/16W +-5%
R242	1	NN05472610	4.7 KOHM 1/16W +-5%
R244	1	NN05472610	4.7 KOHM 1/16W +-5%
R245	1	NN05101610	100 OHM 1/16W +-5%
R246	1	NN05473610	47 KOHM 1/16W +-5%
R247	1	NN05000610	0 OHM 1/16W
R248	1	NN05472610	4.7 KOHM 1/16W +-5%
R249	1	NN05472610	4.7 KOHM 1/16W +-5%
R250	1	NN05473610	47 KOHM 1/16W +-5%
R251	1	NN05103610	10 KOHM 1/16W +-5%
R252	1	NN05101610	100 OHM 1/16W +-5%
R253	1	NN05473610	47 KOHM 1/16W +-5%
R254	1	NN05562610	5.6 KOHM 1/16W +-5%
R255	1	NN05223610	22 KOHM 1/16W +-5%
R256	1	NN05000610	0 OHM 1/16W
R257	1	NI05222110	2.2 KOHM 1/10W +-5%
R258	1	NN05000610	0 OHM 1/16W
R259	1	NN05101610	100 OHM 1/16W +-5%
R260	1	NN05473610	47 KOHM 1/16W +-5%
R261	1	NN05000610	0 OHM 1/16W
R262	1	NN05222610	2.2 KOHM 1/16W +-5%
R263	1	NN05101610	100 OHM 1/16W +-5%
R264	1	NN05473610	47 KOHM 1/16W +-5%
R265	1	NN05472610	4.7 KOHM 1/16W +-5%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
R266	1	NN05101610	100 OHM 1/16W +-5%
R267	1	NN05473610	47 KOHM 1/16W +-5%
R268	1	NN05473610	47 KOHM 1/16W +-5%
R269	1	NN05102610	1 KOHM 1/16W +-5%
R270	1	NN05102610	1 KOHM 1/16W +-5%
R271	1	NN05103610	10 KOHM 1/16W +-5%
R272	1	NN05101610	100 OHM 1/16W +-5%
R273	1	NN05473610	47 KOHM 1/16W +-5%
R274	1	NN0502261R	2.2 OHM 1/16W +-5%
R275	1	NN05152610	1.5 KOHM 1/16W +-5%
R276	1	NN05103610	10 KOHM 1/16W +-5%
R277	1	NY05030050	VARIABLE RESISTOR 50 KOHM
R278	1	NN05182610	1.8 KOHM 1/16W +-5%
R279	1	NN05473610	47 KOHM 1/16W +-5%
R280	1	NN05152610	1.5 KOHM 1/16W +-5%
R281	1	NN05470610	47 OHM 1/16W +-5%
R282	1	NN05103610	10 KOHM 1/16W +-5%
R283	1	NN05331610	330 OHM 1/16W +-5%
R284	1	NN05102110	1 KOHM 1/16W +-5%
R286	1	NN05000610	0 OHM 1/16W
R287	1	NN05332610	3.3 KOHM 1/16W +-5%
R288	1	NN05474610	470 KOHM 1/16W +-5%
R289	1	NN05222610	2.2 KOHM 1/16W +-5%
R290	1	NN05103610	10 KOHM 1/16W +-5%
R291	1	NN05104610	100 KOHM 1/16W +-5%
R292	1	NN05103610	10 KOHM 1/16W +-5%
R293	1	NN05105610	1 KOHM 1/16W +-5%
R294	1	NN05332610	3.3 KOHM 1/16W +-5%
R295	1	NN05474610	470 KOHM 1/16W +-5%
R296	1	NN05332610	3.3 KOHM 1/16W +-5%
R297	1	NN05101610	100 OHM 1/16W +-5%
R298	1	NN05104610	100 KOHM 1/16W +-5%
R299	1	NN05102610	1 KOHM 1/16W +-5%
R301	1	NN05472610	4.7 KOHM 1/16W +-5%
R302	1	NN05393610	39 KOHM 1/16W +-5%
R303	1	NN05223610	22 KOHM 1/16W +-5%
R304	1	NN05474610	470 KOHM 1/16W +-5%
R305	1	NN05104610	100 KOHM 1/16W +-5%
R306	1	NN05000610	0 OHM 1/16W
R307	1	NN05272610	2.7 KOHM 1/16W +-5%
R308	1	NN05472610	4.7 KOHM 1/16W +-5%
R309	1	NN05473610	47 KOHM 1/16W +-5%
R310	1	NN05474610	470 KOHM 1/16W +-5%
R311	1	NN05472610	4.7 KOHM 1/16W +-5%
R313	1	NN05151610	150 OHM 1/16W +-5%
R314	1	NN05103610	10 KOHM 1/16W +-5%
R315	1	NN05474610	470 KOHM 1/16W +-5%
R316	1	NN05103610	10 KOHM 1/16W +-5%
R317	1	NN05474610	470 KOHM 1/16W +-5%
R318	1	NN05474610	470 KOHM 1/16W +-5%
R319	1	NN05102610	1 KOHM 1/16W +-5%
R320	1	NN05154610	150 KOHM 1/6W +-5%
R321	1	NN05154610	150 KOHM 1/6W +-5%
R322	1	NN05222610	2.2 KOHM 1/16W +-5%
R323	1	NN05154610	150 KOHM 1/6W +-5%
R324	1	NN05154610	150 KOHM 1/6W +-5%
R325	1	NN05222610	2.2 KOHM 1/16W +-5%
R326	1	NN05000610	0 OHM 1/16W
R327	1	NN05223610	22 KOHM 1/16W +-5%
R328	1	NN05101610	100 OHM 1/16W +-5%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
R329	1	NN05331610	330 OHM 1/16W +-5%
R330	1	NN0502261R	2.2 OHM 1/16W +-5%
R331	1	NN05152610	1.5 KOHM 1/16W +-5%
R332	1	NN05103610	10 KOHM 1/16W +-5%
R333	1	NY05030050	VARIABLE RESISTOR 50 KOHM
R334	1	NN05182610	1.8 KOHM 1/16W +-5%
R335	1	NN05473610	47 KOHM 1/16W +-5%
R336	1	NN05152610	1.5 KOHM 1/16W +-5%
R337	1	NN05470610	47 OHM 1/16W +-5%
R338	1	NN05103610	10 KOHM 1/16W +-5%
R339	1	NN05331610	330 OHM 1/16W +-5%
R340	1	NN05102610	1 KOHM 1/16W +-5%
R342	1	NN05332610	3.3 KOHM 1/16W +-5%
R343	1	NN05474610	470 KOHM 1/16W +-5%
R344	1	NN05222610	2.2 KOHM 1/16W +-5%
R345	1	NN05103610	10 KOHM 1/16W +-5%
R346	1	NN05104610	100 KOHM 1/16W +-5%
R347	1	NN05103610	10 KOHM 1/16W +-5%
R348	1	NN05105610	1 KOHM 1/16W +-5%
R349	1	NN05332610	3.3 KOHM 1/16W +-5%
R350	1	NN05474610	470 KOHM 1/16W +-5%
R351	1	NN05332610	3.3 KOHM 1/16W +-5%
R352	1	NN05101610	100 OHM 1/16W +-5%
R353	1	NN05104610	100 KOHM 1/16W +-5%
R354	1	NN05102610	1 KOHM 1/16W +-5%
R355	1	NN05472610	4.7 KOHM 1/16W +-5%
R356	1	NN05393610	39 KOHM 1/16W +-5%
R357	1	NN05223610	22 KOHM 1/16W +-5%
R358	1	NN05272610	2.7 KOHM 1/16W +-5%
R359	1	NN05472610	4.7 KOHM 1/16W +-5%
R360	1	NN05473610	47 KOHM 1/16W +-5%
R361	1	NN05474610	470 KOHM 1/16W +-5%
R362	1	NN05472610	4.7 KOHM 1/16W +-5%
R363	1	RD1103003R	VARIABLE RESISTOR 10 KOHM
R365	1	NN05223610	22 KOHM 1/16W +-5%
R366	1	NN05393610	39 KOHM 1/16W +-5%
R367	1	NN05334610	330 KOHM 1/16W +-5%
R368	1	NN05154610	150 KOHM 1/6W +-5%
R369	1	NN05821610	820 OHM 1/16W +-5%
R370	1	NN05332610	3.3 KOHM 1/16W +-5%
R371	1	NN05103610	10 KOHM 1/16W +-5%
R372	1	NN05104610	100 KOHM 1/16W +-5%
R373	1	NN05223610	22 KOHM 1/16W +-5%
R374	1	NN05101610	100 OHM 1/16W +-5%
R375	1	NN05331610	330 OHM 1/16W +-5%
R376	1	NN0502261R	2.2 OHM 1/16W +-5%
R377	1	NN05333610	33 KOHM 1/16W +-5%
R378	1	NN05222610	2.2 KOHM 1/16W +-5%
R379	1	NN05473610	47 KOHM 1/16W +-5%
R380	1	NN05473610	47 KOHM 1/16W +-5%
R381	1	NN05105610	1 KOHM 1/16W +-5%
R382	1	NN05333610	33 KOHM 1/16W +-5%
R383	1	NN05103610	10 KOHM 1/16W +-5%
R384	1	NN05333610	33 KOHM 1/16W +-5%
R385	1	NN05473610	47 KOHM 1/16W +-5%
R386	1	NN05273610	27 KOHM 1/16W +-5%
R387	1	NN05471610	470 OHM 1/16W +-5%
R388	1	NN05684610	680 KOHM 1/16W +-5%
R389	1	NN05474610	470 KOHM 1/16W +-5%
R390	1	NN05104610	100 KOHM 1/16W +-5%

REF. DESIG.	QTY	PART NO.	DESCRIPTION	REF. DESIG.	QTY	PART NO.	DESCRIPTION
R391	1	NN05333610	33 KOHM 1/16W +-5%	PH03	1	WZ097X1752	ROTARY CHANNEL SELECTOR P.C. BOARD
R392	1	NY05040050	VARIABLE RESISTOR 500 KOHM	S201	1	SR0202012R	ROTARY CHANNEL SELECTOR
R393	1	NN05473610	47 KOHM 1/16W +-5%	PL01	1	WZ097X2400	DISPLAY P.C. BOARD
R394	1	NN05473610	47 KOHM 1/16W +-5%	C101	1	DK9622320R	0.022 UF +-10%
R395	1	NY01020050	VARIABLE RESISTOR 10 KOHM	C102	1	DK9622320R	0.022 UF +-10%
R396	1	NN05103610	10 KOHM 1/16W +-5%	C103	1	KC097X002R	TANTAL CAP 10 UF/6.3V
R397	1	NY01020050	VARIABLE RESISTOR 10 KOHM	C104	1	DK9622320R	0.022 UF +-10%
R398	1	NN05103610	10 KOHM 1/16W +-5%	C105	1	DK9622320R	0.022 UF +-10%
R399	1	NN05224610	220 KOHM 1/16W +-5%	C106	1	DK9622320R	0.022 UF +-10%
R701	1	NN05224610	220 KOHM 1/16W +-5%	C107	1	DK96103200	0.01 UF +-10%
R702	1	NN05333610	330 OHM 1/16W +-5%	C108	1	DD95101300	100 PF +-5% CH
R703	1	NN05101610	100 OHM 1/16W +-5%	C109	1	DK96102300	0.001 UF +-10%
R704	1	NN05153610	15 KOHM 1/16W +-5%	C110	1	DK96102300	0.001 UF +-10%
R716	1	NN05104610	100 KOHM 1/16W +-5%	C111	1	DK96102300	0.001 UF +-10%
R717	1	NN05223610	27 KOHM 1/16W +-5%	C112	1	DK96102300	0.001 UF +-10%
R718	1	NN05223610	220 OHM 1/16W +-5%	C113	1	DK96102300	0.001 UF +-10%
R719	1	NN05104610	100 KOHM 1/16W +-5%	C114	1	DD91100300	10 PF +-0.5 PF CH
S202	1	SP0101131R	PTT BUTTON	C115	1	DD91100300	10 PF +-0.5 PF CH
S203	1	SP01011200	FUNCTION BUTTON	C116	1	DD91100300	10 PF +-0.5 PF CH
S204	1	SP0101121R	RESET BUTTON	C117	1	DD91100300	10 PF +-0.5 PF CH
X201	1	FQ0400402R	CERAMIC RESONATOR 4 MHZ	C118	1	DD91100300	10 PF +-0.5 PF CH
X202	1	JX2100131R	CRYSTAL RESONATOR 21.345 MHZ	C119	1	DD91100300	10 PF +-0.5 PF CH
X203	1	FM455301B2	CERAMIC FILTER CDBM455C7	C120	1	DD91100300	10 PF +-0.5 PF CH
X204	1	JX2300131R	CRYSTAL RESONATOR 23.505 MHZ	C121	1	DD91100300	10 PF +-0.5 PF CH
X205	1	FM455301B2	CERAMIC FILTER CDBM455C7	C122	1	DK96102300	0.001 UF +-10%
Z201	1	ZB0906092R	LITHIUM BATTERY	C123	1	DK96102300	0.001 UF +-10%
PD01	1	WZ097X0400	DTMF P.C. BOARD	C124	1	DK96102300	0.001 UF +-10%
C901	1	DK9622320R	0.022 UF +-10%	C125	1	DK96102300	0.001 UF +-10%
C902	1	DD95360300	36 PF +-5% CH	C126	1	DK96102300	0.001 UF +-10%
C903	1	DD95360300	36 PF +-5% CH	C127	1	DK96102300	0.001 UF +-10%
C904	1	DK5668320R	0.068 UF +-10%	C128	1	DK96102300	0.001 UF +-10%
C905	1	DK9622320R	0.022 UF +-10%	L101	1	FC9002002R	FERRITE BEAD
C906	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V	L102	1	FC9002002R	FERRITE BEAD
C907	1	DK9622320R	0.022 UF +-10%	Q101	1	HC1020806R	VHF LCD DRIVER UPD7225GB
C908	1	DD9525030R	25 PF +-5% CH	Q102	1	HC1020806R	VHF LCD DRIVER UPD7225GB
C909	1	DD9525030R	25 PF +-5% CH	Q103	1	XZ0310432R	LCD LF7530M
Q901	1	HC10253050	TC35310F	Q104	1	HC10185050	TC4S69F
Q902	1	HC40940620	UPD4094BG	Q105	1	HC10185050	TC4S69F
Q903	1	HC10018320	LE40872	Q106	1	HZ2000420R	DIODE MC2848
Q904	1	HZ2000320R	DIODE MC2846	Q107	1	BA1000220R	DIGITAL TRANSISTOR RTIP441M
R901	1	NN05104610	100 KOHM 1/16W +-5%	Q108	1	HZ2000320R	DIODE MC2846
R902	1	NN05104610	100 KOHM 1/16W +-5%	Q109	1	HZ3001905R	ZENER DIODE 02C24.3Y
R903	1	NN05223610	22 KOHM 1/16W +-5%	Q110	1	HZ2001205R	DIODE 1SS272
R904	1	NN05223610	22 KOHM 1/16W +-5%	Q111	1	HZ2001205R	DIODE 1SS272
R905	1	NN05224610	220 KOHM 1/16W +-5%	Q112	1	HZ2001205R	DIODE 1SS272
R906	1	NN05224610	220 KOHM 1/16W +-5%	Q113	1	HZ2001205R	DIODE 1SS272
R907	1	NY05020050	VARIABLE RESISTOR 5 KOHM	Q114	1	HZ2000420R	DIODE MC2848
R908	1	NN05103610	10 KOHM 1/16W +-5%	R101	1	NN05470610	47 OHM 1/16W +-5%
X901	1	FQ0358404R	CERAMIC RESONATOR 3.579545 MHZ	R102	1	NN05332610	3.3 KOHM 1/16W +-5%
X902	1	FQ0358404R	CERAMIC RESONATOR 3.579545 MHZ	R103	1	NN05333610	33 KOHM 1/16W +-5%
PH01	1	WZ097X1752	VHF VOLUME CONTROL P.C. BOARD	R104	1	NN05103610	10 KOHM 1/16W +-5%
C276	1	DK9622320R	0.022 UF +-10%	R105	1	NN05103610	10 KOHM 1/16W +-5%
R312	1	RD0103009R	VARIABLE RESISTOR 10 KOHM	R106	1	NN05472610	4.7 KOHM 1/16W +-5%
PH02	1	WZ097X1762	UHF VOLUME CONTROL P.C. BOARD	R107	1	NN05000610	0 OHM 1/16W
R364	1	NN05151610	150 OHM 1/16W +-5%	R108	1	NN05104610	100 KOHM 1/16W +-5%
C317	1	DK9622320R	0.022 UF +-10%	R109	1	NN05103610	10 KOHM 1/16W +-5%
				R110	1	NN05103610	10 KOHM 1/16W +-5%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
R111	1	NN05103610	10 KOHM 1/16W +-5%
R112	1	NN05472610	4.7 KOHM 1/16W +-5%
R113	1	NN05103610	10 KOHM 1/16W +-5%
R114	1	NN05103610	10 KOHM 1/16W +-5%
R115	1	NN05103610	10 KOHM 1/16W +-5%
R116	1	NN05103610	10 KOHM 1/16W +-5%
R117	1	NN05103610	10 KOHM 1/16W +-5%
R118	1	NN05103610	10 KOHM 1/16W +-5%
R119	1	NN05102610	1 KOHM 1/16W +-5%
R120	1	NN05102610	1 KOHM 1/16W +-5%
R121	1	NN05223610	22 KOHM 1/16W +-5%
R122	1	NN05223610	22 KOHM 1/16W +-5%
R123	1	NN05102610	1 KOHM 1/16W +-5%
R124	1	NN05102610	1 KOHM 1/16W +-5%
R125	1	NN05223610	22 KOHM 1/16W +-5%
R126	1	NN05223610	22 KOHM 1/16W +-5%
R127	1	NN05102610	1 KOHM 1/16W +-5%
R128	1	NN05102610	1 KOHM 1/16W +-5%
R129	1	NN05223610	22 KOHM 1/16W +-5%
R130	1	NN05223610	22 KOHM 1/16W +-5%
R131	1	NN05102610	1 KOHM 1/16W +-5%
R132	1	NN05102610	1 KOHM 1/16W +-5%
R133	1	NN05223610	22 KOHM 1/16W +-5%
R134	1	NN05223610	22 KOHM 1/16W +-5%
R135	1	NN05102610	1 KOHM 1/16W +-5%
R136	1	NN05102610	1 KOHM 1/16W +-5%
R137	1	NN05223610	22 KOHM 1/16W +-5%
R138	1	NN05102610	1 KOHM 1/16W +-5%
R139	1	NN05102610	1 KOHM 1/16W +-5%
R140	1	NN05223610	22 KOHM 1/16W +-5%
R141	1	NN05102610	1 KOHM 1/16W +-5%
R142	1	NN05102610	1 KOHM 1/16W +-5%
R143	1	NN05223610	22 KOHM 1/16W +-5%
R144	1	NN05102610	1 KOHM 1/16W +-5%
R145	1	NN05102610	1 KOHM 1/16W +-5%
R146	1	NN05223610	22 KOHM 1/16W +-5%
R147	1	NN05102610	1 KOHM 1/16W +-5%
R148	1	NN05102610	1 KOHM 1/16W +-5%
R149	1	NN05102610	1 KOHM 1/16W +-5%
R150	1	NN05102610	1 KOHM 1/16W +-5%
R151	1	NN05333610	33 KOHM 1/16W +-5%
R152	1	NN05101610	100 OHM 1/16W +-5%
R153	1	NN05102610	1 KOHM 1/16W +-5%
R154	1	NN05102610	1 KOHM 1/16W +-5%
R155	1	NN05102610	1 KOHM 1/16W +-5%
R156	1	NN05102610	1 KOHM 1/16W +-5%
R157	1	NN05102610	1 KOHM 1/16W +-5%
R158	1	NN05104610	100 KOHM 1/16W +-5%
R159	1	NN05000610	0 OHM 1/16W
V101	1	IN1005014R	LCD LAMP
V102	1	IN1005014R	LCD LAMP
PR01	1	WZ097X1712	RF P.C. BOARD
C401	1	DK96102300	0.001 UF +-10%
C402	1	DK95470300	47 PF +-5%
C403	1	KC097X002R	TANTAL CAP 10 UF/6.3V
C404	1	DK56473200	0.047 UF +-10%
C405	1	KC097X001R	TANTAL CAP 10 UF/6.3V
C406	1	DK96102300	0.001 UF +-10%

REF. DESIG.	QTY	PART NO.	DESCRIPTION
C407	1	DK56472300	0.047 UF +-10%
C408	1	DK96102300	0.001 UF +-10%
C409	1	DK96102300	0.001 UF +-10%
C410	1	CX11000030	TRIMMING CAP 0.001 UF
C411	1	DD95270300	27 PF +-5% CH
C412	1	DD9510136R	100 PF +-5% UJ
C413	1	DD9556036R	56 PF +-5% UJ
C414	1	DD96102300	0.001 UF +-10%
C415	1	DD96102300	0.001 UF +-10%
C416	1	DD90050300	5 PF +-0.25 PF CH
C417	1	DK46224200	0.22 UF +-10%
C418	1	KC097X002R	TANTAL CAP 10 UF/6.3V
C419	1	DK56473200	0.047 UF +-10%
C420	1	DD96102300	0.001 UF +-10%
C421	1	DD96102300	0.001 UF +-10%
C422	1	EY10601620	ELECT CAP 10 UF/16V
C423	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V
C424	1	DD96102300	0.001 UF +-10%
C425	1	DD96102300	0.001 UF +-10%
C426	1	KC097X003R	TANTAL CAP 22 UF/6.3V
C427	1	DD96102300	0.001 UF +-10%
C428	1	DD96102300	0.001 UF +-10%
C429	1	DK96102300	0.001 UF +-10%
C434	1	DD95220300	22 PF +-5% CH
C435	1	DD91060300	6 PF +-0.5 PF CH
C436	1	DK96102300	0.001 UF +-10%
C437	1	DD95270300	27 PF +-5% CH
C438	1	DD95220300	22 PF +-5% CH
C439	1	DD95470300	47 PF +-5% CH
C440	1	DD90050300	5 PF +-0.25 PF CH
C441	1	DK96102300	0.001 UF +-10%
C442	1	DK96102300	0.001 UF +-10%
C443	1	DK96102300	0.001 UF +-10%
C444	1	DD91080300	8 PF +-0.5 PF CH
C445	1	DD90010300	1 PF +-0.25 PF CK
C446	1	DD91090300	9 PF +-0.5 PF CH
C447	1	DD90015300	1.5 PF +-0.25 PF CK
C448	1	DD91080300	8 PF +-0.5 PF CH
C449	1	DK96102300	0.001 UF +-10%
C450	1	DD95470300	47 PF +-5% CH
C451	1	DD95470300	47 PF +-5% CH
C452	1	DK96103200	0.01 UF +-10%
C453	1	DD90040300	4 PF +-0.25 PF CH
C454	1	DK96103200	0.01 UF +-10%
C455	1	DK96102300	0.001 UF +-10%
C457	1	DD91070300	7 PF +-0.5 PF CH
C458	1	DD91070300	7 PF +-0.5 PF CH
C459	1	DD90040300	4 PF +-0.25 PF CH
C460	1	DD95120300	12 PF +-5% CH
C461	1	DD55150300	15 PF +-5% CH
C462	1	DD90030300	3 PF +-0.25 PF CJ
C463	1	DD90030300	3 PF +-0.25 PF CJ
C464	1	CX10400010	TRIMMING CAP 6 PF
C465	1	DD90050300	5 PF +-0.25 PF CH
C466	1	DD90030300	3 PF +-0.25 PF CJ
C467	1	DK96102300	0.001 UF +-10%
C468	1	DD91090300	9 PF +-0.5 PF CH
C469	1	DD95220300	22 PF +-5% CH
C470	1	CX10160010	TRIMMING CAP 3 PF
C471	1	DD90010300	1 PF +-0.25 PF CK

REF. DESIG.	QTY	PART NO.	DESCRIPTION	REF. DESIG.	QTY	PART NO.	DESCRIPTION
C472	1	DD90010300	1 PF +-0.25 PF CK	C534	1	EJ10605010	ELECT CAP 10 UF/50V
C473	1	CX10160010	TRIMMING CAP 3 PF	C535	1	DK96102300	0.001 UF +-10%
C474	1	DD91070300	7 PF +-0.5 PF CK	C536	1	DK96102300	0.001 UF +-10%
C475	1	DD95150300	15 PF +-5% CH	C537	1	DK96102300	0.001 UF +-10%
C476	1	DK96102300	0.001 UF +-10%	C538	1	DK96102300	0.001 UF +-10%
C477	1	DD91080300	8 PF +-0.5 PF CH	C539	1	DD90020300	2 PF +-0.25 PF CK
C478	1	DD95180300	18 PF +-5% CH	C540	1	DD90010300	1 PF +-0.25 PF CK
C479	1	CX10160010	TRIMMING CAP 3 PF	C541	1	DD90050300	5 PF +-0.25 PF CH
C480	1	DD90010300	1 PF +-0.25 PF CK	C542	1	DK96102300	0.001 UF +-10%
C481	1	DD90015300	1.5 PF +-0.25 PF CK	C543	1	DD55390300	39 PF +-5% CH
C482	1	CX10400010	TRIMMING CAP CAP 6 PF	C544	1	DK96102300	0.001 UF +-10%
C483	1	DD91080300	8 PF +-0.5 PF CH	C545	1	DK96102300	0.001 UF +-10%
C484	1	DD90050300	5 PF +-0.25 PF CH	C546	1	DK96102300	0.001 UF +-10%
C485	1	DD90005300	0.5 PF +-0.25 PF CK	C547	1	DK96102300	0.001 UF +-10%
C486	1	DK96102300	0.001 UF +-10%	C548	1	DK96102300	0.001 UF +-10%
C487	1	DK96102300	0.001 UF +-10%	C549	1	DK96102300	0.001 UF +-10%
C488	1	DD90050300	5 PF +-0.25 PF CH	C550	1	KC097X002R	TANTAL CAP 10 UF/6.3V
C489	1	DK96102300	0.001 UF +-10%	C551	1	DK96102300	0.001 UF +-10%
C490	1	DD91100300	10 PF +-0.5 PF CH	C552	1	DK96102300	0.001 UF +-10%
C491	1	DD91100300	10 PF +-0.5 PF CH	C553	1	DK96102300	0.001 UF +-10%
C492	1	DD95220300	22 PF +-5% CH	C554	1	DK96102300	0.001 UF +-10%
C493	1	DD95220300	22 PF +-5% CH	C555	1	DK96102300	0.001 UF +-10%
C494	1	DD90030300	3 PF +-0.25 PF CJ	C556	1	DK96102300	0.001 UF +-10%
C495	1	DD90030300	3 PF +-0.25 PF CJ	C557	1	DK96102300	0.001 UF +-10%
C496	1	DD95220300	22 PF +-5% CH	C558	1	DK96102300	0.001 UF +-10%
C497	1	DD95220300	22 PF +-5% CH	C559	1	DK96102300	0.001 UF +-10%
C498	1	DD90005300	0.5 PF +-0.25 PF CK	C560	1	DK96102300	0.001 UF +-10%
C499	1	DD95390300	39 PF +-5% CH	C561	1	DK96102300	0.001 UF +-10%
C501	1	DK96103200	0.01 UF +-10%	C562	1	DK96102300	0.001 UF +-10%
C502	1	DD91060300	6 PF +-0.5 PF CH	C563	1	DK96102300	0.001 UF +-10%
C503	1	DK96103200	0.01 UF +-10%	C564	1	DD90008300	0.75 PF +-0.25 PF CK
C504	1	DD90040300	4 PF +-0.25 PF CH	C567	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V
C505	1	DD95150300	15 PF +-5% CH	C568	1	DK96102300	0.001 UF +-10%
C506	1	DD95150300	15 PF +-5% CH	C569	1	DK96102300	0.001 UF +-10%
C507	1	DK96102300	0.001 UF +-10%	C570	1	DK96102300	0.001 UF +-10%
C508	1	DK96102300	0.001 UF +-10%	C571	1	DK96102300	0.001 UF +-10%
C509	1	DK96102300	0.001 UF +-10%	C572	1	DK96102300	0.001 UF +-10%
C510	1	DK96102300	0.001 UF +-10%	C574	1	DK9622320R	0.022 UF +-10%
C511	1	DK96102300	0.001 UF +-10%	C577	1	DK96102300	0.001 UF +-10%
C512	1	DK9622320R	0.022 UF +-10%	C580	1	DD91100300	10 PF +-0.5 PF CH
C513	1	DD95120300	12 PF +-5% CH	C582	1	DD95150300	15 PF +-5% CH
C515	1	DK96102300	0.001 UF +-10%	C583	1	DD95101300	100 PF +-5% CH
C516	1	DK96102300	0.001 UF +-10%	C586	1	DD95330300	33 PF +-5% CH
C517	1	DD95150300	15 PF +-5% CH	F401	1	XU821800NS	CRYSTAL FILTER 21S15BU MCF
C518	1	DD90020300	2 PF +-0.25 PF CK	F402	1	XU823050N3	CRYSTAL FILTER 23S15BU MCF
C519	1	DD95220300	22 PF +-5% CH	J402	1	YJ0100307R	EXTERNAL MICROPHONE JACK
C520	1	DD90015300	1.5 PF +-0.25 PF CK	J403	1	YJ0100325R	EXTERNAL SPEAKER JACK (V,U)
C521	1	DD90050300	5 PF +-0.25 PF CH	J404	1	YJ0100325R	EXTERNAL SPEAKER JACK (U)
C522	1	DK96102300	0.001 UF +-10%	L401	1	LU01102010	CHIP COIL 1 OH
C523	1	DD95221300	220 PF +-5% CG	L402	1	LU21330010	CHIP COIL 33 NH
C524	1	DK96102300	0.001 UF +-10%	L403	1	LU01102010	CHIP COIL 1 OH
C525	1	DK96102300	0.001 UF +-10%	L404	1	FC9002002R	FERRITE BEAD
C526	1	DD90040300	4 PF +-0.25 PF CH	L405	1	NL030050HR	AIR COIL 2.5T
C527	1	DK96102300	0.001 UF +-10%	L406	1	NL030050JR	AIR COIL 3.5T
C528	1	DD90050300	5 PF +-0.25 PF CH	L407	1	NL030050KR	AIR COIL 4.5T
C529	1	DD90050300	5 PF +-0.25 PF CH	L408	1	LA5501812R	ANTENNA COIL
C530	1	DK96102300	0.001 UF +-10%	L409	1	LA5501813R	ANTENNA COIL
C531	1	DK96102300	0.001 UF +-10%	L410	1	LA5501813R	ANTENNA COIL
C532	1	DK96102300	0.001 UF +-10%	L411	1	LA5501813R	ANTENNA COIL
C533	1	DD91070300	7 PF +-0.5 PF CH	L412	1	LA5501814H	ANTENNA COIL

REF. DESIG.	QTY	PART NO.	DESCRIPTION
L413	1	ML030050GR	AIR COIL 1.5T
L414	1	ML030050GR	AIR COIL 1.5T
L415	1	ML030050GR	AIR COIL 1.5T
L416	1	ML030050GR	AIR COIL 1.5T
L417	1	ML030050GR	AIR COIL 1.5T
L418	1	ML030050GR	AIR COIL 1.5T
L419	1	ML030050GR	AIR COIL 1.5T
L420	1	ML030050GR	AIR COIL 1.5T
L421	1	ML030050GR	AIR COIL 1.5T
L422	1	ML030050GR	AIR COIL 1.5T
L423	1	ML030050GR	AIR COIL 1.5T
L424	1	ML030050GR	AIR COIL 1.5T
L425	1	LA5501814R	ANTENNA COIL
L426	1	LU21680010	CHIP COIL 68 NH
L427	1	FC9002002R	FERRITE BEAD
L428	1	ML030050JR	AIR COIL 3.5T
L429	1	LU01102010	CHIP COIL 1 OH
L430	1	FC9002002R	FERRITE BEAD
L431	1	FC9002002R	FERRITE BEAD
L432	1	LC1102017R	CHOKE COIL 1 OH
L433	1	ML030050JR	AIR COIL 3.5T
L434	1	ML030050GR	AIR COIL 1.5T
L435	1	ML030050GR	AIR COIL 1.5T
L436	1	ML030050HR	AIR COIL 2.5T
L437	1	LC1102017R	CHOKE COIL 1 OH
L438	1	FC9002002R	FERRITE BEAD
L439	1	FC9002002R	FERRITE BEAD
L440	1	FC9002002R	FERRITE BEAD
L441	1	FC9002002R	FERRITE BEAD
L442	1	FC9002002R	FERRITE BEAD
L443	1	FC9002002R	FERRITE BEAD
L444	1	FC9002002R	FERRITE BEAD
L445	1	FC9002002R	FERRITE BEAD
L446	1	LC1102013R	CHOKE COIL 1 OH
Q401	1	HC1004618R	VHF PLL IC MB1504PF-G
Q402	1	BA2000220R	DIGITAL TRANSISTOR RT1N140M
Q403	1	HZ20018050	DIODE 1SS302
Q404	1	BA2003121R	DIGITAL TRANSISTOR FMW1
Q405	1	HX341541AR	2SC4154(F)
Q407	1	BA2000220R	DIGITAL TRANSISTOR RT1N140M
Q408	1	HZ20018050	DIODE 1SS302
Q409	1	HZ20006020	DIODE MA714
Q410	1	HZ2000320R	DIODE MC2846
Q411	1	BA1000220R	DIGITAL TRANSISTOR RT1P441M
Q412	1	HY2030218R	2SX302(Y2)
Q413	1	HY203021AR	2SX302(Y1)
Q414	1	HX327141CR	2SC2714(Y)
Q415	1	HX33583010	2SC3583(R34)
Q416	1	HX3342901R	2SC3429
Q417	1	HX3424500R	2SC4245
Q418	1	HZ2001705R	DIODE 1SS241
Q419	1	HX3342901R	2SC3429
Q420	1	HX3424500R	2SC4245
Q421	1	HX327141CR	2SC2714(Y)
Q422	1	HZ2002605R	DIODE 1SS309
Q423	1	HZ2001705R	DIODE 1SS241
Q424	1	HT32053000	2SC2053
Q425	1	HC10068200	M57796MA
Q426	1	HZ2001721R	DIODE RLS135
Q427	1	HZ2001721R	DIODE RLS135

REF. DESIG.	QTY	PART NO.	DESCRIPTION
Q428	1	BA2000320R	DIGITAL TRANSISTOR RT1N141M
Q429	1	HZ2002705R	DIODE 1SS239
Q430	1	HZ2000420R	DIODE MC2848
Q431	1	HX33356010	2SC3356(R24)
Q432	1	HX33357100	2SC3357(RE)
Q433	1	HC10067200	M57797MA
Q434	1	HZ2002705R	DIODE 1SS239
Q435	1	HZ2001721R	DIODE RLS135
Q436	1	HZ2001721R	DIODE RLS135
Q437	1	BA2000320R	DIGITAL TRANSISTOR RT1N141M
Q438	1	HZ2000420R	DIODE MC2848
Q439	1	HC10058210	FRS1
Q440	1	HZ3001105R	ZENER DIODE 02CZ2.4
Q441	1	HX111621A0	2SA1162(GR)
Q442	1	BA2000220R	DIGITAL TRANSISTOR RT1N140M
Q443	1	HX341541AR	2SC4154(F)
R401	1	NN05102610	1 KOHM 1/16W +-5%
R402	1	NN05223610	22 KOHM 1/16W +-5%
R403	1	NN05105610	1 MOHM 1/16W +-5%
R404	1	NN05101610	100 OHM 1/16W +-5%
R405	1	NN05471610	470 OHM 1/16W +-5%
R406	1	NN05471610	470 OHM 1/16W +-5%
R407	1	NN05153610	15 KOHM 1/16W +-5%
R408	1	NN05222610	2.2 KOHM 1/16W +-5%
R409	1	NN05102610	1 KOHM 1/16W +-5%
R410	1	NN05473610	47 KOHM 1/16W +-5%
R411	1	NN05473610	47 KOHM 1/16W +-5%
R412	1	NN05473610	47 KOHM 1/16W +-5%
R413	1	NN05223610	22 KOHM 1/16W +-5%
R414	1	NN05150610	15 OHM 1/16W +-5%
R415	1	NN05000110	0 OHM 1/10W
R416	1	NN05102610	1 KOHM 1/16W +-5%
R417	1	NN05104610	100 KOHM 1/16W +-5%
R418	1	NN05473610	47 KOHM 1/16W +-5%
R419	1	NN05332610	3.3 KOHM 1/16W +-5%
R420	1	NN05102610	1 KOHM 1/16W +-5%
R421	1	NN05101610	100 OHM 1/16W +-5%
R422	1	NN05102610	1 KOHM 1/16W +-5%
R423	1	NN05101610	100 OHM 1/16W +-5%
R424	1	NN05102610	1 KOHM 1/16W +-5%
R425	1	NN05621610	820 OHM 1/16W +-5%
R426	1	NN05103610	10 KOHM 1/16W +-5%
R427	1	NN05222610	2.2 KOHM 1/16W +-5%
R428	1	NN05473610	47 KOHM 1/16W +-5%
R429	1	NN05473610	47 KOHM 1/16W +-5%
R430	1	NN05473610	47 KOHM 1/16W +-5%
R431	1	NN05223610	22 KOHM 1/16W +-5%
R432	1	NN05102610	1 KOHM 1/16W +-5%
R433	1	NN05150610	15 OHM 1/16W +-5%
R434	1	NN05102610	1 KOHM 1/16W +-5%
R435	1	NN05563610	5.6 KOHM 1/16W +-5%
R436	1	NN05102610	1 KOHM 1/16W +-5%
R437	1	NN05103610	10 KOHM 1/16W +-5%
R438	1	NN05101610	100 OHM 1/16W +-5%
R439	1	NN05000610	0 OHM 1/16W
R440	1	NN05102610	1 KOHM 1/16W +-5%
R441	1	NI05000110	0 OHM 1/10W
R442	1	NI05102110	1 KOHM 1/10W +-5%
R443	1	NI05472110	4.7 KOHM 1/10W +-5%
R444	1	NN05153610	15 KOHM 1/16W +-5%


REF. DESIG.	QTY	PART NO.	DESCRIPTION	REF. DESIG.	QTY	PART NO.	DESCRIPTION
R445	1	N105472110	4.7 KOHM 1/10W +-5%	R507	1	NN0508261R	8.2 OHM 1/16W +-5%
R446	1	NN05153610	15 KOHM 1/16W +-5%	R508	1	NN05471610	470 OHM 1/16W +-5%
R447	1	N105102110	1 KOHM 1/10W +-5%	R509	1	NN05473610	47 KOHM 1/16W +-5%
R448	1	N105102110	1 KOHM 1/10W +-5%	R510	1	NN05101610	100 OHM 1/16W +-5%
R449	1	NN05101610	100 OHM 1/16W +-5%	R511	1	NN05101610	100 OHM 1/16W +-5%
R450	1	NN05470610	47 OHM 1/16W +-5%	R512	1	NN05103610	10 KOHM 1/16W +-5%
R451	1	NN05101610	100 OHM 1/16W +-5%	R513	1	NN05223610	22 KOHM 1/16W +-5%
R452	1	NN05152610	1.5 KOHM 1/16W +-5%	R514	1	NN05472610	4.7 KOHM 1/16W +-5%
R453	1	N105000110	0 OHM 1/10W	R515	1	NN05183610	18 KOHM 1/16W +-5%
R454	1	NN05472610	4.7 KOHM 1/16W +-5%	R516	1	NN05103610	10 KOHM 1/16W +-5%
R455	1	NN05470610	47 OHM 1/16W +-5%	R517	1	NN05223610	22 KOHM 1/16W +-5%
R456	1	NN05102610	1 KOHM 1/16W +-5%	R518	1	NN05103610	10 KOHM 1/16W +-5%
R457	1	NN05684610	680 KOHM 1/16W +-5%	R519	1	NN05102610	1 KOHM 1/16W +-5%
R458	1	NN05102610	1 KOHM 1/16W +-5%	R520	1	NN05103610	10 KOHM 1/16W +-5%
R459	1	NN05470610	47 OHM 1/16W +-5%	R521	1	NN05103610	10 KOHM 1/16W +-5%
R460	1	NN05153610	15 KOHM 1/16W +-5%	R522	1	NN05102610	1 KOHM 1/16W +-5%
R461	1	NN05562610	5.6 KOHM 1/16W +-5%	R523	1	NN05102610	1 KOHM 1/16W +-5%
R462	1	NN05331610	330 OHM 1/16W +-5%	R526	1	NN05223610	22 KOHM 1/16W +-5%
R463	1	NN0504761R	4.7 OHM 1/16W +-5%	R527	1	NN05223610	22 KOHM 1/16W +-5%
R464	1	NN05221610	220 OHM 1/16W +-5%	R528	1	NN05223610	22 KOHM 1/16W +-5%
R465	1	NN05153610	15 KOHM 1/16W +-5%	W401	1	Y80007069X	15 PIN CONNECTIVE CORD TO J201
R466	1	NN05562610	5.6 KOHM 1/16W +-5%	W402	1	Y80003014X	8 PIN CONNECTIVE CORD TO J202
R467	1	NN05331610	330 OHM 1/16W +-5%	W403	1	Y80003015R	6 PIN CONNECTIVE CORD TO J203
R468	1	NN0504761R	4.7 OHM 1/16W +-5%	X401	1	JX1200131R	CRYSTAL RESONATOR 12.8 MHZ
R469	1	NN05221610	220 OHM 1/16W +-5%				
R470	1	NN05333610	33 KOHM 1/16W +-5%	PV01	1	WZ097X1730	VHF VCO P.C. BOARD
R471	1	NN05103610	10 KOHM 1/16W +-5%				
R472	1	NN05221610	220 OHM 1/16W +-5%	C601	1	DD9004036H	4 PF +-0.25 PF UJ
R473	1	NN05223610	22 KOHM 1/16W +-5%	C602	1	DD9004036H	4 PF +-0.25 PF UJ
R474	1	NN05103610	10 KOHM 1/16W +-5%	C603	1	DK96102300	0.001 UF +-10%
R475	1	NN05472610	4.7 KOHM 1/16W +-5%	C604	1	DD9001036R	1 PF +-0.25 PF UJ
R476	1	NN05331610	330 OHM 1/16W +-5%	C605	1	DD9001036R	1 PF +-0.25 PF UJ
R477	1	NN0504761R	4.7 OHM 1/16W +-5%	C606	1	DK96102300	0.001 UF +-10%
R478	1	NN05331610	330 OHM 1/16W +-5%	C607	1	DK96102300	0.001 UF +-10%
R479	1	NN05224610	220 KOHM 1/16W +-5%	C608	1	DD9510136R	100 PF +-5% UJ
R480	1	NN05000610	0 OHM 1/16W	C609	1	DD9004036R	4 PF +-0.25 PF UJ
R481	1	NN05470610	47 OHM 1/16W +-5%	C610	1	DD9004036R	4 PF +-0.25 PF UJ
R482	1	NN05102610	1 KOHM 1/16W +-5%	C611	1	DD9001036R	1 PF +-0.25 PF UJ
R483	1	NN05684610	680 KOHM 1/16W +-5%	C612	1	DK96102300	0.001 UF +-10%
R484	1	NN05102610	1 KOHM 1/16W +-5%	C613	1	DD9002036H	2 PF +-0.25 PF UJ
R485	1	NN05101610	100 OHM 1/16W +-5%	C614	1	DK96102300	0.001 UF +-10%
R486	1	NN05223610	22 KOHM 1/16W +-5%	C615	1	DD90010300	1 PF +-0.25 PF CK
R487	1	NN05181610	180 OHM 1/16W +-5%	C616	1	DD90050300	5 PF +-0.25 PF CK
R488	1	NN05471610	470 OHM 1/16W +-5%	C617	1	DK96102300	0.001 UF +-10%
R489	1	NN05471610	470 OHM 1/16W +-5%	L601	1	ML0320503R	AIR COIL 5.5T
R490	1	NN05102610	1 KOHM 1/16W +-5%	L602	1	LC1221015R	CHOKE COIL 2.2 OH
R491	1	NN0508261R	8.2 OHM 1/16W +-5%	L603	1	LC1221017R	CHOKE COIL 0.22 OH
R492	1	NN05471610	470 OHM 1/16W +-5%	L604	1	ML0300505R	AIR COIL 4.5T
R494	1	NN05101610	100 OHM 1/16W +-5%	L605	1	LC1221015R	CHOKE COIL 2.2 OH
R495	1	NN05101610	100 OHM 1/16W +-5%	L606	1	LU2110101R	CHIP COIL 0.1 OH
R496	1	NN05333610	33 KOHM 1/16W +-5%	Q601	1	HZ4000505R	VARI-CAP DIODE 1SV161
R497	1	NY05030050	VARIABLE RESISTOR 50 KOHM	Q602	1	HZ4000505R	VARI-CAP DIODE 1SV161
R498	1	NN05103610	10 KOHM 1/16W +-5%	Q603	1	HY202101YR	2SK210(Y2)
R499	1	NN05472610	4.7 KOHM 1/16W +-5%	Q604	1	HX3424500R	2SC4245
R501	1	NN05103610	10 KOHM 1/16W +-5%	Q605	1	HZ2001105R	DIODE 1SS268
R502	1	NY01020050	VARIABLE RESISTOR 1 KOHM	Q606	1	HZ4000505R	VARI-CAP DIODE 1SV161
R503	1	NN05101610	100 OHM 1/16W +-5%	Q607	1	HZ4000505R	VARI-CAP DIODE 1SV161
R504	1	NN05471610	470 OHM 1/16W +-5%	Q608	1	HY202101YR	2SK210(Y2)
R505	1	NN05471610	470 OHM 1/16W +-5%	Q610	1	HX3424500R	2SC4245
R506	1	NN05102610	1 KOHM 1/16W +-5%	Q609	1	HZ4000605R	VARI-CAP DIODE 1SV153

REF. DESIG.	QTY	PART NO.	DESCRIPTION
Q611	1	HX3424500R	2SC4245
R601	1	NN05222610	2.2 KOHM 1/16W +-5%
R602	1	NN05101610	100 OHM 1/16W +-5%
R603	1	NN05101610	100 OHM 1/16W +-5%
R604	1	NN05223610	22 KOHM 1/16W +-5%
R605	1	NN05103610	10 KOHM 1/16W +-5%
R606	1	NN05472610	4.7 KOHM 1/16W +-5%
R607	1	NN05102610	1 KOHM 1/16W +-5%
R608	1	NN05223610	22 KOHM 1/16W +-5%
R609	1	NN05222610	2.2 KOHM 1/16W +-5%
R610	1	NN05103610	10 KOHM 1/16W +-5%
R611	1	NN05103610	10 KOHM 1/16W +-5%
R612	1	NN05470610	47 OHM 1/16W +-5%
R613	1	NN05101610	100 OHM 1/16W +-5%
R614	1	NN05271610	270 OHM 1/16W +-5%
R615	1	NN05103610	10 KOHM 1/16W +-5%
R616	1	NN05472610	4.7 KOHM 1/16W +-5%
R617	1	NN05682610	6.8 KOHM 1/16W +-5%
R618	1	NN05472610	4.7 KOHM 1/16W +-5%
PU01	1	WZ097X1720	UHF VCO P.C. BOARD
C651	1	DK96102300	0.001 UF +-10%
C652	1	DD9510136R	100 PF +-5% UJ
C653	1	DD9515036R	15 PF +-5% UJ
C654	1	DD9515036R	15 PF +-5% UJ
C655	1	DK96102300	0.001 UF +-10%
C656	1	DD9002036R	2 PF +-0.25 PF UJ
C657	1	DK96102300	0.001 UF +-10%
C658	1	DD9002036R	2 PF +-0.25 PF UJ
C659	1	DK96102300	0.001 UF +-10%
C660	1	DD9510136R	100 PF +-5% UJ
C661	1	DK96102300	0.001 UF +-10%
C662	1	DD9106036R	6 PF +-0.5 PF UJ
C663	1	DD9110036R	0.3 PF +-0.5 PF UJ
C664	1	DD9000536R	0.53 PF +-0.25 PF UJ
C665	1	DK96102300	0.001 UF +-10%
C666	1	DD9001036R	1 PF +-0.25 PF UJ
C667	1	DK96102300	0.001 UF +-10%
C668	1	DD9002036R	2 PF +-0.25 PF UJ
C669	1	DD9002036R	2 PF +-0.25 PF UJ
C670	1	DK96102300	0.001 UF +-10%
L651	1	ML0320502R	AIR COIL 2.5T
L652	1	LC1102017R	CHOKE COIL 1 UH
L653	1	ML030050GR	AIR COIL 1.5T
L654	1	LC1102017R	CHOKE COIL 1 UH
L655	1	ML030050HR	AIR COIL 2.5T
L656	1	LC1102017R	CHOKE COIL 1 UH
L657	1	ML030050GR	AIR COIL 1.5T
L658	1	ML030050GR	AIR COIL 1.5T
Q651	1	HZ4000605R	VARI-CAP DIODE 1SV153
Q652	1	HZ4000605R	VARI-CAP DIODE 1SV153
Q653	1	HX33356010	2SC3356(R24)
Q654	1	HX33356010	2SC3356(R24)
Q655	1	HX33356010	2SC3356(R24)
Q656	1	HZ4000805R	VARI-CAP DIODE 1SV212
Q657	1	HZ4000805R	VARI-CAP DIODE 1SV212
Q658	1	HY205081A0	2SK508(K52)
Q659	1	HZ4000605R	VARI-CAP DIODE 1SV153
Q660	1	HX33356010	2SC3356(R24)

REF. DESIG.	QTY	PART NO.	DESCRIPTION
Q661	1	HX33356010	2SC3356(R24)
R651	1	NN05222610	2.2 KOHM 1/16W +-5%
R652	1	NN05102610	1 KOHM 1/16W +-5%
R653	1	NN05121610	120 OHM 1/16W +-5%
R654	1	NN05391610	390 OHM 1/16W +-5%
R655	1	NN05153610	15 KOHM 1/16W +-5%
R656	1	NN05223610	22 KOHM 1/16W +-5%
R657	1	NN05103610	10 KOHM 1/16W +-5%
R658	1	NN05472610	4.7 KOHM 1/16W +-5%
R659	1	NN05331610	330 OHM 1/16W +-5%
R660	1	NN05473610	47 KOHM 1/16W +-5%
R661	1	NN05222610	2.2 KOHM 1/16W +-5%
R662	1	NN05222610	2.2 KOHM 1/16W +-5%
R663	1	NN05101610	100 OHM 1/16W +-5%
R664	1	NN05103610	10 KOHM 1/16W +-5%
R665	1	NN05101610	100 OHM 1/16W +-5%
R666	1	NN05103610	10 KOHM 1/16W +-5%
R667	1	NN05472610	4.7 KOHM 1/16W +-5%
R668	1	NN05331610	330 OHM 1/16W +-5%
R669	1	NN05103610	10 KOHM 1/16W +-5%
R670	1	NN05472610	4.7 KOHM 1/16W +-5%
R671	1	NN05331610	330 OHM 1/16W +-5%

(0027)

Tone Squelch unit

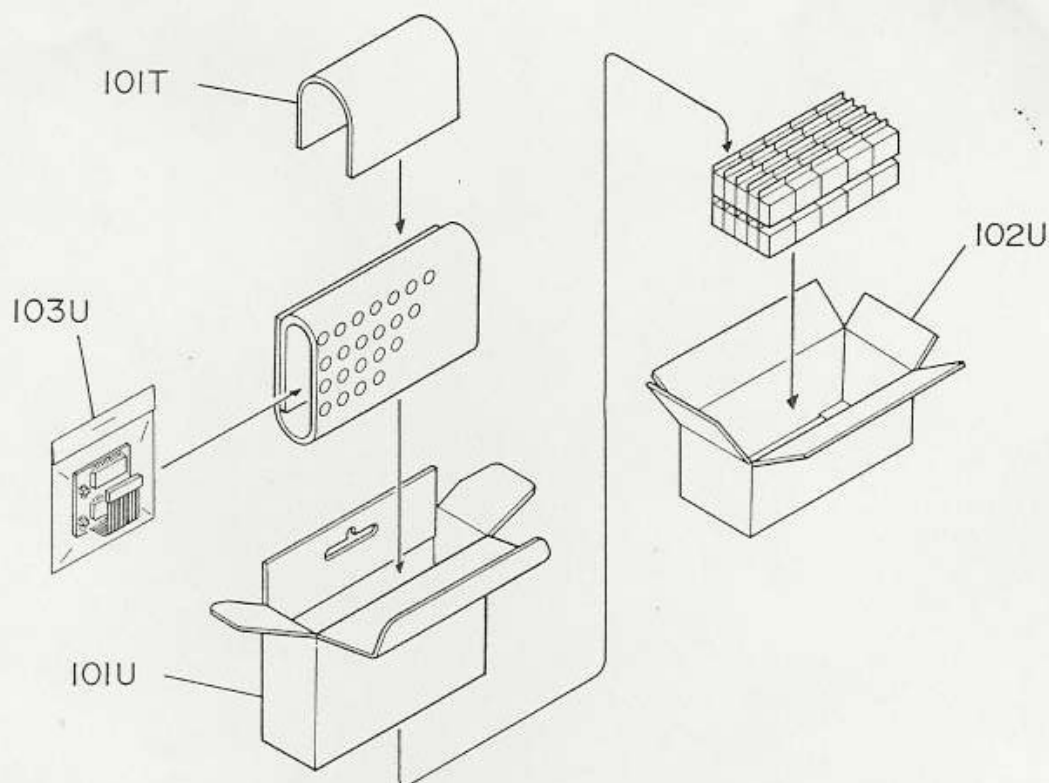

REF. DESIG.	QTY	PART NO.	DESCRIPTION	REF. DESIG.	QTY	PART NO.	DESCRIPTION
PT01	1	WY112X0010	TONE SQUELCH P.C. BOARD	101B	1	112X122010	ADHESIVE FOR CTN520 P.C. BOARD
C801	1	DK9622320R	0.022 UF +-10%	200S	1	9510901190	MONTHLY PRODUCTION LABEL
C802	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V	101T	1	112X851210	USERS MANUAL
C803	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V	101U	1	112X801010	PACKING CASE
C804	1	DD95470300	47 PF +-5%	102U	50	112X805010	MASTER CARTON
C805	1	DD95470300	47 PF +-5%	103U	1	9011010010	POLYTHY BAG
C806	1	DK96102300	0.001 UF +-10%	R801	1	NY05040050	TRIM. RESISTOR 500 KOHM
C807	1	DK96103200	0.01 UF +-10%	R802	1	NY05040050	TRIM. RESISTOR 500 KOHM
C809	1	DK9622320R	0.022 UF +-10%	R803	1	NN05223610	22 KOHM 1/16W +-5%
C810	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V	R804	1	NN05223610	22 KOHM 1/16W +-5%
C811	1	KC097X001R	TANTAL CAP 4.7 UF/6.3V	W801	1	YB0003018R	CONNECTOR TO J204
C812	1	DD95470300	47 PF +-5%	X801	1	FQ0358403R	CERAMIC RESONATOR 3.579545 MHz
C813	1	DD95470300	47 PF +-5%	X802	1	FQ0358403R	CERAMIC RESONATOR 3.579545 MHz
C814	1	DD96102300	0.001 UF +-10%				
C815	1	DD96103200	0.01 UF +-10%				
Q801	1	HC10008530	S-7119A				
Q802	1	HC1000220R	S-7119A				
Q803	1	BA1000220R	DIGITAL TRANSISTOR RT1P441W				
Q804	1	BA1000220R	DIGITAL TRANSISTOR RT1P441W				

<0000>

Q801, Q802 VOLTAGE

PIN -NO	TSQ OFF	TSQ RX	TONE TX
1	5.04V	5.03V	5.00V
2	3.17V	2.36V	2.33V
3	5.04V	2.45V	2.46V
4	5.01V	2.57V	4.97V
5	5.01V	5.00V	4.97V
6	5.01V	5.00V	4.97V
7	5.01V	5.00V	4.97V
8	5.01V	5.00V	4.97V
9	5.01V	5.00V	4.97V
10	0.01V	0.01V	0.01V
11	4.25V	4.25V	4.25V
12	0.01V	0.01V	0.01V
13	5.04V	5.03V	5.00V
14	0V	0V	0V
15	0V	0V	0V
16	0V	5.03V	4.81V
17	0V	0.08V TONE - HI 5.03V	0.07V
18	0V	2.51V	2.50V
19	2.52V	2.51V	2.50V
20	0V	0V	0V
21	0V	0V	0V
22	0V	0V	0V
23	2.52V	2.51V	2.49V
24	5.01V	5.00V	4.97V
25	0V	0V	0V
26	2.26V	2.26V	2.24V
27	2.26V	2.25V	2.24V
28	5.04V	5.03V	5.00V

TONE SQUELCH P.C. BOARD

TO PA01-J204

TONU
TONV
AFU
AFV
SO
SCK
SQTU
SQTV
GND
TEU
TEV
5V

